WTP1-100LR4

100G CFP1 LR4 10km Single / Applications 3

Part Number WTP1-100LR4	Data Rate 103.1Gbps 111.8Gbps	Temperature -5~70C



1. Product Overview

Features

- Supports multi-rate (100GBASE-100GE and OTU4)
- from 103.1Gb/s to 111.8Gb/s aggregate
- Lane bit rate 25.78 Gb/s 100GE, 27.95 Gb/s OTU4
- Up to 10km transmission on SMF
- LAN WDM laser and PIN receiver
- High speed I/O electrical interface (CAUI-10)
- MDIO interface with integrated Digital Diagnostic monitoring
- CFP MSA package with duplex LC connector
- Single +3.3V power supply
- Maximum power consumption 10W
- Operating case temperature: -5 to +70 °C
- Complies with IEEE802.3ba and ITU-T G.959

Applications

- 100G BASE-LR4

2. Ordering Information

Part No.	Data Rate	Laser	Fiber Type	Distance	Optical Interface	Temp	DDMI
WTP1-100LR4	103.1Gbps 111.8Gbps	LWDM	SMF	10km	LC	-5~70C	Y

3. Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Storage Temperature	TS	-40	-	+85	°C	
Supply Voltage	VCC	-0.5	-	+4.0	V	
Operating Relative Humidity	RH	-	-	+85	%	

4. Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Operating Case Temperature	TC	-5	-	+70	°C	
Power Supply Voltage	VCC	3.13	3.3	3.47	V	
Power Supply Current	ICC	-	-	2.9	A	
Typical Power Dissipation	PD	-	-	10	W	
Aggregate Bit Rate	BRAVE	-	103.125	-	Gb/s	
Lane Bit Rate	BRLANE	-	25.78	-	Gb/s	
Transmission Distance	TD		-	10	km	Over SMF

5. Optical Parameters

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter
Center Wavelength Lane 0	λ0	1294.53	1295.56	1296.59	nm	
Center Wavelength Lane 1	λ1	1299.02	1300.05	1301.09	nm	
Center Wavelength Lane 2	λ2	1303.54	1304.58	1305.63	nm	
Center Wavelength Lane 3	λ3	1308.09	1309.14	1310.19	nm	
Total Launch Power, 100GE	PALL	-	-	10.5	dBm	1
Average Launch Power per Lane, 100GE	PTX_LANE	-4.3	-	4.5	dBm	1
OMA per Lane, 100GE	OMA	-1.3	-	4.5	dBm	1
OMA–TDP per Lane, 100GE	OMA_TDP	-2.3	-	-	dBm	
Difference in launch power between lanes	PTX_Delta_LANE	-	-	3.6	dB	
Total Launch Output Power, OTU4	PALL	-	-	10	dBm	1
Average Launch Power per Lane, OTU4	PTX_LANE	-0.6	-	4	dBm	1
Average Output Power (Laser Turn off)	P0UT-OFF	-	-	-40	dBm	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
Extinction Ratio, 100GE	ER1	4	-	-	dB	

Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Extinction Ratio, OTU4	ER2	4	-	6.5	dB	
Transmitter and Dispersion Penalty	TDP	-	-	2.2	dB	2
Optical Return Loss Tolerance	ORLT	-	-	20	dB	
Optical Eye Mask, 100GE	Compliant with IEEE 802.3ba	Compliant with IEEE 802.3ba	Compliant with IEEE 802.3ba	Compliant with IEEE 802.3ba	Compliant with IEEE 802.3ba	2
Optical Eye Mask, OTU4	Compliant with ITU-T G.959.1	Compliant with ITU-T G.959.1	Compliant with ITU-T G.959.1	Compliant with ITU-T G.959.1	Compliant with ITU-T G.959.1	2
Receiver	Receiver	Receiver	Receiver	Receiver	Receiver	Receiver
Center Wavelength Lane 0	λ0	1294.53	1295.56	1296.59	nm	
Center Wavelength Lane 1	λ1	1299.02	1300.05	1301.09	nm	
Center Wavelength Lane 2	λ2	1303.54	1304.58	1305.63	nm	
Center Wavelength Lane 3	λ3	1308.09	1309.14	1310.19	nm	
Damage threshold	P_damage	5.5	-	-	dBm	
Average Rx Power per Lane, 100GE	PRx _LANe	-10.6	-	4.5	dBm	3
OMA Sensitivity per Lane, 100GE	POMA_LANE	-	-	-8.6	dBm	3
Average Rx Power per Lane, OTU4	PRx_AVE_LANe	-6.9	-	4	dBm	4
Average Rx Power per Lane, OTU4	PRx_AVE_LANe	-8.8	-	2.9	dBm	4,5
Sensitivity per Lane, OTU4	PRx_OMA_LANe	-	-	-10.3	dBm	4
Sensitivity per Lane, OTU4	PRx_OMA_LANe	-	-	-8.4	dBm	4,5
Reflectance	Ref	-	-	-26	dB	
LOS Assert per lane	LOSA	-20	-	-	dBm	
LOS De-assert	LOSD	-	-	-12	dBm	
LOS Hysteresis	LOSH	0.5	-	4.0	dB	

6. Electrical Characteristics


Parameter	Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Transmitter (Module Input)	Transmitter (Module Input)	Transmitter (Module Input)	Transmitter (Module Input)	Transmitter (Module Input)	Transmitter (Module Input)	Transmitter (Module Input)	Transmitter (Module Input)
Differential Data Input Amplitude	Differential Data Input Amplitude	VIN,P-P	85	-	850	mVpp	
Differential Termination Mismatch	Differential Termination Mismatch		-	-	5	%	
Tx_Disable	Normal Operation	VIL	-0.3	-	0.8	V	
Tx_Disable	Laser Disable	VIH	2.0	-	VCC+0.3	V	

Parameter	Parameter	Symbol	Min.	Typical	Max.	Unit	Notes
Receiver (Module Output)	Receiver (Module Output)	Receiver (Module Output)	Receiver (Module Output)	Receiver (Module Output)	Receiver (Module Output)	Receiver (Module Output)	Receiver (Module Output)
Differential Data Output Amplitude	Differential Data Output Amplitude	VOUT,P-P	200	-	760	mVpp	
Differential Termination Mismatch (1MHZ)	Differential Termination Mismatch (1MHZ)		-	-	5	%	
Output Rise/Fall Time, 20%~80%	Output Rise/Fall Time, 20%~80%	TR	12	-	-	ps	
Rx_LOS	Normal Operation	VOL	-	-	0.2	V	
Rx_LOS	Lose Signal	VOH	VCC-0.2	-	-	V	

7. Digital Diagnostics

Parameter	Range	Accuracy	Unit	Calibration
Temperature	-5 to 70	±3	ºC	Internal
Voltage	0 to VCC	0.1	V	Internal
Tx Bias Current Per Lane	0 to 100	10%	mA	Internal
Tx Output Power Per Lane	-7.3 to 7.5	±2	dBm	Internal
Rx Power (Each Lane)	-16 to 5.5	±2	dBm	Internal

8. Connector Pin Orientation

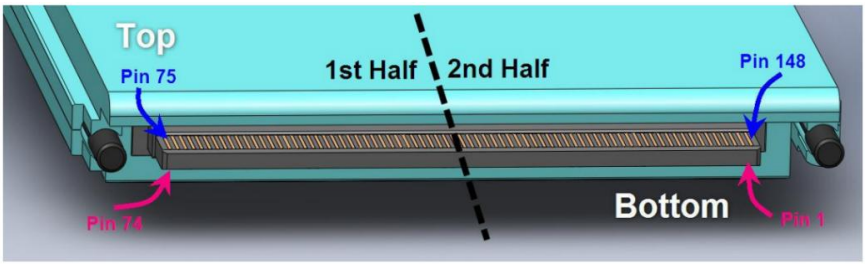


9. Pin Descriptions

	Top Row (2nd Half)		Bottom Row (2nd Half)
148	GND	1	3.3V_GND
147	REFCLKn	2	3.3V_GND
146	REFCLKp	3	3.3V_GND
145	GND	4	3.3V_GND
144	*N.C.*	5	3.3V_GND
143	*N.C.*	6	3.3V
142	GND	7	3.3V
141	TX9n	8	3.3V
140	TX9p	9	3.3V
139	GND	10	3.3V
138	TX8n	11	3.3V
137	TX8p	12	3.3V
136	GND	13	3.3V
135	TX7n	14	3.3V
134	TX7p	15	3.3V
133	GND	16	3.3V_GND
132	TX6n	17	3.3V_GND
131	TX6p	18	3.3V_GND
130	GND	19	3.3V_GND
129	TX5n	20	3.3V_GND
128	TX5p	21	VND_IO_A
127	GND	22	VND_IO_B
126	TX4n	23	GND
125	TX4p	24	*(TX_MCLKn)*
124	GND	25	*(TX_MCLKp)*
123	TX3n	26	GND
122	TX3p	27	VND_IO_C
121	GND	28	VND_IO_D
120	TX2n	29	VND_IO_E
119	TX2p	30	PRG_CNTL1
118	GND	31	PRG_CNTL2
117	TX1n	32	PRG_CNTL3
116	TX1p	33	PRG_ALRM1
115	GND	34	PRG_ALRM2
114	TX0n	35	PRG_ALRM3
113	TX0p	36	TX_DIS
112	GND	37	MOD_LOPWR

	Top Row (1st Half)		Bottom Row (1st Half)
111	GND	38	MOD_ABS
110	*N.C.*	39	MOD_RSTn
109	*N.C.*	40	RX_LOS
108	GND	41	GLB_ALRMn
107	RX9n	42	PRTADR4
106	RX9p	43	PRTADR3
105	GND	44	PRTADR2
104	RX8n	45	PRTADR1
103	RX8p	46	PRTADR0
102	GND	47	MDIO
101	RX7n	48	MDC
100	RX7p	49	GND
99	GND	50	VND_IO_F
98	RX6n	51	VND_IO_G
97	RX6p	52	GND
96	GND	53	VND_IO_H
95	RX5n	54	VND_IO_J
94	RX5p	55	3.3V_GND
93	GND	56	3.3V_GND
92	RX4n	57	3.3V_GND
91	RX4p	58	3.3V_GND
90	GND	59	3.3V_GND
89	RX3n	60	3.3V
88	RX3p	61	3.3V
87	GND	62	3.3V
86	RX2n	63	3.3V
85	RX2p	64	3.3V
84	GND	65	3.3V
83	RX1n	66	3.3V
82	RX1p	67	3.3V
81	GND	68	3.3V
80	RX0n	69	3.3V
79	RX0p	70	3.3V_GND
78	GND	71	3.3V_GND
77	*(RX_MCLKn)*	72	3.3V_GND
76	*(RX_MCLKp)*	73	3.3V_GND
75	GND	74	3.3V_GND

10. Mechanical Specifications

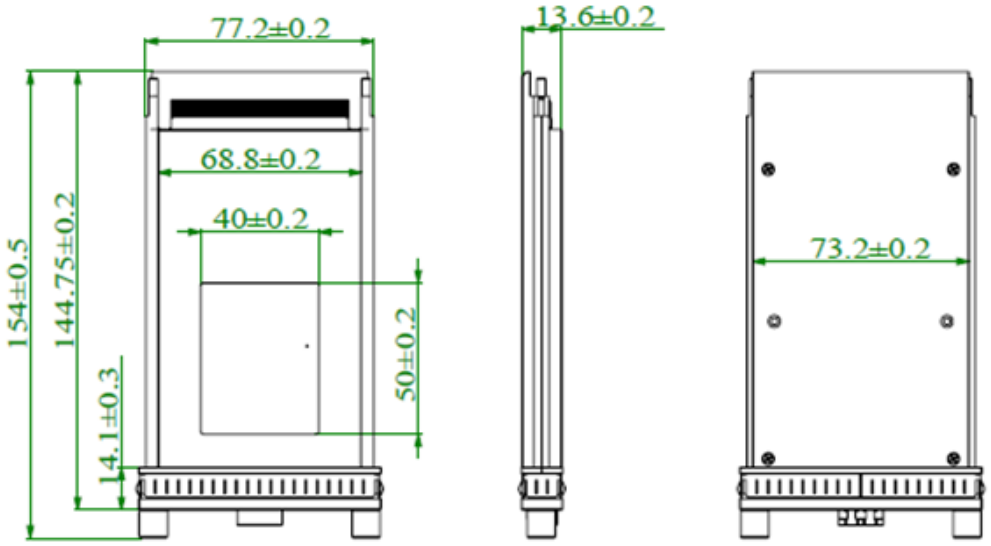

11. Revision History

Version	Date	Description	Prepared by
V6	2025	Unified WincoTek datasheet format	WincoTek
V6.1	2026-10-23	Engineering and format review	WincoTek