WTCFP100-LR4C
CFP LR4 Transceiver

100Gb/s LAN-WDM SMF 10km / Product Overview 3

Part Number	Temperature
WTCFP100-LR4C	0°C~+70°C



1. Product Overview

The WincoTek CFP LR4 is the optical transceiver module which is a hot pluggable form factor designed for high-speed optical networking application. The WincoTek CFP LR4 is designed for 100 Gigabit Ethernet and OTU4 application and provides 100GBASE-LR4 、4I1-9D1Fcompliant optical interface, CAUI electrical interface and MDIO module management interface. The WincoTek CFP LR4 converts 10-lane 10.3Gb/s electrical data streams to 4-lane LAN-WDM 25.78/27.95Gb/s optical output signal and 4-lane LAN-WDM 25.78/27.95Gb/s optical input signal to 10-lane 10.3Gb/s electrical data streams. This 10-lane 10.3Gb/s electrical signal is fully compliant with IEEE 802.3ba CAUI specification. The high-performance Cooled LAN-WDM EA-DFB transmitter and high sensitivity PIN receiver provide superior performance for 100Gigabit Ethernet applications up to 10km links and compliant optical interface with OTU4 4I1-9D1F requirements.

The WincoTek CFP LR4 contains a duplex LC connector for the optical interface and a 148-pin connector for the electrical interface. Figure 1 shows the functional block diagram of WincoTek CFP LR4.

Features

- 4 independent full-duplex channels
- Compliant with 100GBASE-LR4 and 4I1-9D1F
- Support line rates from 103.125 Gbps to 111.81 Gbps
- Integrated LAN WDM EML TOSA / ROSA for up to 10 km reach over SMF
- CAUI (10x10G) Electrical Interface and 4-lane 25.78/27.95Gb/s optical interface
- Duplex LC optical receptacle
- MDIO Interface for module management
- Single 3.3 V power supply
- Case operating temperature range:0°C to 70°C
- Power dissipation < 9W
- STANDARD
- Compliant to IEEE 802.3ba and ITU-T G959.1

Applications

- 100G Ethernet
- ITU-T OTU4

2. Ordering Information

Part Number	Data Rate (Gbps)	Wavelength (nm)	Transmission Distance(m)	Temperature (oC) (Operating Case)
WTCFP100-LR4C	103.1Gb/s	LWDM	10km SMF	0°C~+70°C

3. Absolute Maximum Ratings

Parameter	Symbol	Min	Typical	Max	Units	Notes
Storage Temperature	Ts	-40	-	85	ºC	
Relative Humidity	RH	5	-	95	%	
Power Supply Voltage	VCC	-0.3	-	4	V	
Signal Input Voltage		Vcc-0.3	-	Vcc+0.3	V	
Receive Input Optical Power (Damage threshold)	Pdmg			5.5	dBm	

4. Optical Parameters

Parameter	Symbol	Min	Typ	Max	Unit	NOTE
Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter
Signaling Speed per Lane			25.78125 ± 100 ppm		Gbps	
Wavelength Assignment	λ0	1294.53	1295.56	1296.59	nm	
Wavelength Assignment	λ1	1299.02	1300.05	1301.09	nm	
Wavelength Assignment	λ2	1303.54	1304.58	1305.63	nm	
Wavelength Assignment	λ3	1308.09	1309.14	1310.19	nm	
Total Output. Power	POUT			10.5	dBm	
Transmit OMA per Lane		-1.3		4.5	dBm	
Average Launch Power Per lane		-4.3		4.5	dBm	
SMSR		30			dB	
Optical Extinction Ratio	ER	4			dB	
Average launch Power off per lane	Poff			-30	dBm	
RIN	RIN			-130	dB/Hz	
Output Eye Mask definition {X1，X2，X3，Y1，Y2，Y3}	{0.25，0.4，0.45，0.25，0.28，0.4}	{0.25，0.4，0.45，0.25，0.28，0.4}	{0.25，0.4，0.45，0.25，0.28，0.4}	{0.25，0.4，0.45，0.25，0.28，0.4}	{0.25，0.4，0.45，0.25，0.28，0.4}	1
Receiver	Receiver	Receiver	Receiver	Receiver	Receiver	Receiver
Signaling Speed per Lane			25.78125 ± 100 ppm		Gbps	
Wavelength Assignment		1294.53	1295.56	1296.59	nm	
Wavelength Assignment		1299.02	1300.05	1301.09	nm	
Wavelength Assignment		1303.54	1304.58	1305.63	nm	

Parameter	Symbol	Min	Typ	Max	Unit	NOTE
Wavelength Assignment		1308.09	1309.14	1310.19	nm	
Receive Power (OMA) per Lane	ROMA			4.5	dBm	
Average Input Power per Channel	RXPx	-10.6		4.5	dBm	2
Receiver Sensitivity (OMA) per Lane	Rxsens			-8.6	dBm	
LOS Assert	LOSA	-30			dBm	
LOS De-Assert	LOSD			-12	dBm	
Receiver Reflectance	Rr			-26	dB	

5. Optical Parameters

Parameter	Symbol	Min	Typ	Max	Unit	NOTE
Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter
Signaling Speed per Lane			27.9525± 20 ppm		Gbps	
Wavelength Assignment	λ0	1294.53	1295.56	1296.59	nm	
Wavelength Assignment	λ1	1299.02	1300.05	1301.09	nm	
Wavelength Assignment	λ2	1303.54	1304.58	1305.63	nm	
Wavelength Assignment	λ3	1308.09	1309.14	1310.19	nm	
Total Output. Power	POUT			8.9	dBm	
Average Launch Power Per lane		-2.5		2.9	dBm	
SMSR		30			dB	
Optical Extinction Ratio	ER	7			dB	
Average launch Power off per lane	Poff			-30	dBm	
Output Eye Mask definition {X1，X2，X3，Y1，Y2，Y3}	{0.25，0.4，0.45，0.25，0.28，0.4}	{0.25，0.4，0.45，0.25，0.28，0.4}	{0.25，0.4，0.45，0.25，0.28，0.4}	{0.25，0.4，0.45，0.25，0.28，0.4}	{0.25，0.4，0.45，0.25，0.28，0.4}	3
Receiver	Receiver	Receiver	Receiver	Receiver	Receiver	Receiver
Signaling Speed per Lane			27.9525± 20 ppm		Gbps	
Wavelength Assignment		1294.53	1295.56	1296.59	nm	
Wavelength Assignment		1299.02	1300.05	1301.09	nm	
Wavelength Assignment		1303.54	1304.58	1305.63	nm	
Wavelength Assignment		1308.09	1309.14	1310.19	nm	

Parameter	Symbol	Min	Typ	Max	Unit	NOTE
Average Input Power per Channel	RXPx	-8.8		2.9	dBm	4
Equivalent Sensitivity per Channel	Rxsens			-10.3	dBm	
LOS Assert	LOSA	-30			dBm	
LOS De-Assert	LOSD			-12	dBm	
Receiver Reflectance	Rr			-26	dB	

6. Electrical Characteristics

Parameter	Symbol	Symbol	Min	Typ.	Typ.	Max	Max	Unit	Unit	Notes
Supply currents and voltages	Supply currents and voltages	Supply currents and voltages	Supply currents and voltages	Supply currents and voltages	Supply currents and voltages	Supply currents and voltages	Supply currents and voltages	Supply currents and voltages	Supply currents and voltages	Supply currents and voltages
Voltage	Vcc	Vcc	3.2	3.3	3.3	3.4	3.4	V	V	With Respect to GND
Supply current	Icc	Icc				2.7	2.7	A	A	
Power dissipation	Pwr	Pwr				9.0	9.0	W	W	
Power dissipation (low power mode)	Plp	Plp				2.0	2.0	W	W	
Low speed control and sense signals, 3.3 V LVCMOS	Low speed control and sense signals, 3.3 V LVCMOS	Low speed control and sense signals, 3.3 V LVCMOS	Low speed control and sense signals, 3.3 V LVCMOS	Low speed control and sense signals, 3.3 V LVCMOS	Low speed control and sense signals, 3.3 V LVCMOS	Low speed control and sense signals, 3.3 V LVCMOS	Low speed control and sense signals, 3.3 V LVCMOS	Low speed control and sense signals, 3.3 V LVCMOS	Low speed control and sense signals, 3.3 V LVCMOS	Low speed control and sense signals, 3.3 V LVCMOS
Outputs low voltage	Outputs low voltage	VOL	-0.3	-0.3			0.2	0.2	V	
Output high voltage	Output high voltage	VOH	Vcc-0.2	Vcc-0.2			Vcc+0.3	Vcc+0.3	V	
Input low voltage	Input low voltage	VIL	-0.3	-0.3			0.8	0.8	V	
Input high voltage	Input high voltage	VIH	2	2			Vcc+ 0.3	Vcc+ 0.3	V	
Input leakage current	Input leakage current	IIN	-10	-10			10	10	μA	
Low speed control and sense signals, 1.2 V LVCMOS	Low speed control and sense signals, 1.2 V LVCMOS	Low speed control and sense signals, 1.2 V LVCMOS	Low speed control and sense signals, 1.2 V LVCMOS	Low speed control and sense signals, 1.2 V LVCMOS	Low speed control and sense signals, 1.2 V LVCMOS	Low speed control and sense signals, 1.2 V LVCMOS	Low speed control and sense signals, 1.2 V LVCMOS	Low speed control and sense signals, 1.2 V LVCMOS	Low speed control and sense signals, 1.2 V LVCMOS	Low speed control and sense signals, 1.2 V LVCMOS
Outputs low voltage	Outputs low voltage	VOL	-0.3	-0.3			0.2	0.2	V	
Output high voltage	Output high voltage	VOH	1.0	1.0			1.5	1.5	V	
Input low voltage	Input low voltage	VIL	-0.3	-0.3			0.36	0.36	V	
Input high voltage	Input high voltage	VIH	0.84	0.84			1.5	1.5	V	
Input leakage current	Input leakage current	IIN	-100	-100			100	100	μA	

7. Electrical Characteristics

Starting Address in Hex	Ending Address in Hex	Access Type	Allocated Size	Data Bit Width	Table Name and Description
0000	7FFF	N/A	32768	N/A	Reserved for IEEE 802.3 Use.
8000	807F	RO	128	8	CFP NVR 1. Basic ID registers.
8080	80FF	RO	128	8	CFP NVR 2. Extended ID registers.
8100	817F	RO	128	8	CFP NVR 3. Network lane specific registers.
8180	81FF	RO	128	8	CFP NVR 4.
8200	83FF	RO	4x128	N/A	MSA Reserved.
8400	847F	RO	128	8	Vendor NVR 1. Vendor data registers.
8480	84FF	RO	128	8	Vendor NVR 2. Vendor data registers.
8500	87FF	RO	6x128	N/A	Reserved by CFP MSA.
8800	887F	R/W	128	8	User NVR 1. User data registers.
8880	88FF	R/W	128	8	User NVR 2. User data registers.
8900	8EFF	RO	12x128	N/A	Reserved by CFP MSA.
8F00	8FFF	N/A	2x128	N/A	Reserved for User private use
9000	9FFF	RO	4096	N/A	Reserved for vendor private use.
A000	A07F	R/W	128	16	CFP Module VR 1. CFP Module level control and DDM registers.
A080	A0FF	R/W	128	16	MLG VR 1. MLG Management Interface registers
A100	A1FF	RO	2x128	N/A	Reserved by CFP MSA.
A200	A27F	R/W	128	16	Network Lane VR 1. Network lane specific registers.
A280	A2FF	R/W	128	16	Network Lane VR 2. Network lane specific registers.
A300	A37F	R/W	128	16	Network Lane VR 3. Network Lane n Vendor Specific FAWS Registers
A380	A3FFF	RO	128	N/A	Reserved by CFP MSA
A400	A47F	R/W	128	16	Host Lane VR 1. Host lane specific registers.

Starting Address in Hex	Ending Address in Hex	Access Type	Allocated Size	Data Bit Width	Table Name and Description
A480	ABFF	RO	15x128	N/A	Reserved by CFP MSA.
AC00	AFFF	R/W	8x128	16	Common Data Block Registers
B000	BFFF	R/W	32x128	16	Allocated for OIF MSA-100GLH modules
C000	FFFF	RO	4x4096	N/A	Reserved by CFP MSA.

8. Pin Descriptions

Pin no.	Name	Logic	Description
1	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
2	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
3	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
4	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
5	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
6	3.3V		
7	3.3V		
8	3.3V		
9	3.3V		
10	3.3V		
11	3.3V		
12	3.3V		
13	3.3V		
14	3.3V		
15	3.3V		
16	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
17	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
18	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground

Pin no.	Name	Logic	Description
19	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
20	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
21	NUC		Module Vendor I/O. Must No Connect at host board
22	NUC		Module Vendor I/O. Must No Connect at host board
23	GND		
24	TX_M CLKn		TX Monitor Clock Output (Negative)
25	TX_M CLKp		TX Monitor Clock Output (Positive)
26	GND		
27	NUC		Module Vendor I/O. Must No Connect at host board
28	NUC		Module Vendor I/O. Must No Connect at host board
29	NUC		Module Vendor I/O. Must No Connect at host board
30	PRG_CNTL1	LVCMOS w/ PUR	Programmable Control 1 set over MDIO, M SA Default: TRXIC_RSTn, TX & RX ICs reset, "0": reset, "1" or NC: enabled = not used
31	PRG_CNTL2	LVCMOS w/ PUR	Programmable Control 2 set over MDIO, M SA Default: Hardware Interlock LSB,"00": ≤8W, "01":≤16W, "10": ≤24W, "11" or NC: ≤32W = not used
32	PRG_CNTL3	LVCMOS w/ PUR	Programmable Control 2 set over M DIO, M SA Default: Hardware Interlock M SB,"00": ≤8W, "01":≤16W, "10": ≤24W, "11" or NC: ≤32W = not used
33	PRG_ALRM 1	LVCM OS	Programmable Alarm 1 set over MDIO, M SA Default: HIPWR_ON, "1": module, power up completed, "0": module not high powered up
34	PRG_ALRM 2	LVCM OS	Programmable Alarm 2 set over MDIO, M SA Default: M OD_READY, "1": Ready, "0":not Ready,
35	PRG_ALRM 3	LVCM OS	Programmable Alarm 3 set over MDIO, M SA Default: M OD_FAULT, fault detected,1": Fault, "0": No Fault
36	TX_DIS	LVCM OS w/ PUR	Transmitter Disable for all lanes, "1" or NC = transmitter disabled, "0" = transmitter enabled
37	MOD_LOPWR	LVCM OS w/ PUR	Module Low Power M ode. "1" or NC: module in low power (safe) mode, "0": power- on enabled
38	MOD_ABS		Module Absent. "1" or NC: module absent, "0": module present, Pull Up Resistor on Host


Pin no.	Name	Logic	Description
39	MOD_RSTn	LVCM OS w/ PUR	Module Reset. "0" resets the module, "1" or NC = module enabled, Pull Down Resistor in Module
40	RX_LOS	LVCM OS	Receiver Loss of Optical Signal, "1": low optical signal, "0": normal condition
41	GLB_ALRM n	LVCM OS	Global Alarm. “0": alarm condition in any M DIO Alarm register, "1": no alarm condition, Open Drain, Pull Up Resistor on Host
42	PRTADR4	1.2V CM OS	M DIO Physical Port address bit 4
43	PRTADR3	1.2V CM OS	M DIO Physical Port address bit 3
44	PRTADR2	1.2V CM OS	M DIO Physical Port address bit 2
45	PRTADR1	1.2V CM OS	M DIO Physical Port address bit 1
46	PRTADR0	1.2V CM OS	M DIO Physical Port address bit 0
47	M DIO	1.2V CM OS	Management Data I/O bi-directional data (electrical specs as per 802.3ae and ba)
48	M DC	1.2V CM OS	Management Data Clock (electrical specs as per 802.3ae and ba)
49	GND		
50	NUC		Module Vendor I/O. Must No Connect at host board
51	NUC		Module Vendor I/O. Must No Connect at host board
52	GND		
53	NUC		Module Vendor I/O. Must No Connect at host board
54	NUC		Module Vendor I/O. Must No Connect at host board
55	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
56	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
57	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
58	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
59	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
60	3.3V		3.3V Module Supply Voltage
61	3.3V		3.3V Module Supply Voltage
62	3.3V		3.3V Module Supply Voltage
63	3.3V		3.3V Module Supply Voltage
64	3.3V		3.3V Module Supply Voltage

Pin no.	Name	Logic	Description
65	3.3V		3.3V Module Supply Voltage
66	3.3V		3.3V Module Supply Voltage
67	3.3V		3.3V Module Supply Voltage
68	3.3V		3.3V Module Supply Voltage
69	3.3V		3.3V Module Supply Voltage
70	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
71	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
72	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
73	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
74	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
75	3.3V_GND		3.3V Module Supply Voltage Return Ground, can be separate or tied together with Signal Ground
76	RX_MCLKp		RX Monitor Clock Output (Positive)
77	RX_MCLKn		RX Monitor Clock Output (Negative)
78	GND		
79	RX0p	HS I/O	Lane 0 Receiver Output (Positive)
80	RX0n	HS I/O	Lane 0 Receiver Output (Negative)
81	GND		
82	RX1p	HS I/O	Lane 1 Receiver Output (Positive)
83	RX1n	HS I/O	Lane 1 Receiver Output (Negative)
84	GND		
85	RX2p	HS I/O	Lane 2 Receiver Output (Positive)
86	RX2n	HS I/O	Lane 2 Receiver Output (Negative)
87	GND		
88	RX3p	HS I/O	Lane 3 Receiver Output (Positive)
89	RX3n	HS I/O	Lane 3 Receiver Output (Negative)
90	GND		
91	RX4p	HS I/O	Lane 4 Receiver Output (Positive)
92	RX4n	HS I/O	Lane 4 Receiver Output (Negative)
93	GND		
94	RX5p	HS I/O	Lane 5 Receiver Output (Positive)
95	RX5n	HS I/O	Lane 5 Receiver Output (Negative)
96	GND		

Pin no.	Name	Logic	Description
97	RX6p	HS I/O	Lane 6 Receiver Output (Positive)
98	RX6n	HS I/O	Lane 6 Receiver Output (Negative)
99	GND		
100	RX7p	HS I/O	Lane 7 Receiver Output (Positive)
101	RX7n	HS I/O	Lane 7 Receiver Output (Negative)
102	GND		
103	RX8p	HS I/O	Lane 8 Receiver Output (Positive)
104	RX8n	HS I/O	Lane 8 Receiver Output (Negative)
105	GND		
106	RX9p	HS I/O	Lane 9 Receiver Output (Positive)
107	RX9n	HS I/O	Lane 9 Receiver Output (Negative)
108	GND		
109	NC		Not Connected Internally
110	NC		Not Connected Internally
111	GND		
112	GND		
113	TX0p	HS I/O	Lane 0 Transmitter Input (Positive)
114	TX0n	HS I/O	Lane 0 Transmitter Input (Negative)
115	GND		
116	TX1p	HS I/O	Lane 1Transmitter Input (Positive)
117	TX1n	HS I/O	Lane 1 Transmitter Input (Negative)
118	GND		
119	TX2p	HS I/O	Lane 2Transmitter Input (Positive)
120	TX2n	HS I/O	Lane 2 Transmitter Input (Negative)
121	GND		
122	TX3p	HS I/O	Lane 3 Transmitter Input (Positive)
123	TX3n	HS I/O	Lane 3Transmitter Input (Negative)
124	GND		
125	TX4p	HS I/O	Lane 4 Transmitter Input (Positive)
126	TX4n	HS I/O	Lane 4 Transmitter Input (Negative)
127	GND		
128	TX5p	HS I/O	Lane 5 Transmitter Input (Positive)
129	TX5n	HS I/O	Lane 5 Transmitter Input (Negative)
130	GND		
131	TX6p	HS I/O	Lane 6 Transmitter Input (Positive)

Pin no.	Name	Logic	Description
132	TX6n	HS I/O	Lane 6 Transmitter Input (Negative)
133	GND		
134	TX7p	HS I/O	Lane 7Transmitter Input (Positive)
135	TX7n	HS I/O	Lane 7 Transmitter Input (Negative)
136	GND		
137	TX8p	HS I/O	Lane 8 Transmitter Input (Positive)
138	TX8n	HS I/O	Lane 8Transmitter Input (Negative)
139	GND		
140	TX9p	HS I/O	Lane 9 Transmitter Input (Positive)
141	TX9n	HS I/O	Lane 9 Transmitter Input (Negative)
142	GND		
143	NC		Not Connected Internally
144	NC		Not Connected Internally
145	GND		
146	REFCLKp		Reference Clock Input (Positive)
147	REFCLKn		Reference Clock Input (Negative)
148	GND		

9. Pin Assignment

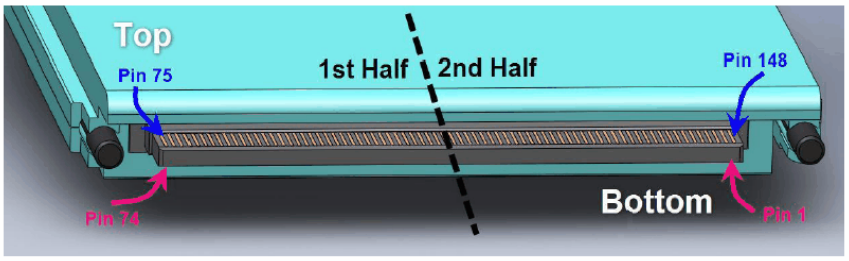


10. Pin Definitions

	Top Row (2nd Half)		Bottom Row (2nd Half)
148	GND	1	3.3V_GND
147	REFCLKn	2	3.3V_GND
146	REFCLKp	3	3.3V_GND
145	GND	4	3.3V_GND
144	N.C.	5	3.3V_GND
143	N.C.	6	3.3V
142	GND	7	3.3V
141	TX9n	8	3.3V
140	TX9p	9	3.3V
139	GND	10	3.3V
138	TX8n	11	3.3V
137	TX8p	12	3.3V
136	GND	13	3.3V
135	TX7n	14	3.3V
134	TX7p	15	3.3V
133	GND	16	3.3V_GND
132	TX6n	17	3.3V_GND
131	TX6p	18	3.3V_GND
130	GND	19	3.3V_GND
129	TX5n	20	3.3V_GND
128	TX5p	21	VND_IO_A
127	GND	22	VND_IO_B
126	TX4n	23	GND
125	TX4p	24	(TX_MCLKn)
124	GND	25	(TX_MCLKp)
123	TX3n	26	GND
122	TX3p	27	VND_IO_C
121	GND	28	VND_IO_D
120	TX2n	29	VND_IO_E
119	TX2p	30	PRG_CNTL1
118	GND	31	PRG_CNTL2
117	TX1n	32	PRG_CNTL3
116	TX1p	33	PRG_ALRM1
115	GND	34	PRG_ALRM2
114	TX0n	35	PRG_ALRM3
113	TX0p	36	TX_DIS
112	GND	37	MOD_LOPWR

	Top Row (1st Half)		Bottom Row (1st Half)
111	GND	38	MOD_ABS
110	N.C.	39	MOD_RSTn
109	N.C.	40	RX_LOS
108	GND	41	GLB_ALRMn
107	RX9n	42	PRTADR4
106	RX9p	43	PRTADR3
105	GND	44	PRTADR2
104	RX8n	45	PRTADR1
103	RX8p	46	PRTADR0
102	GND	47	MDIO
101	RX7n	48	MDC
100	RX7p	49	GND
99	GND	50	VND_IO_F
98	RX6n	51	VND_IO_G
97	RX6p	52	GND
96	GND	53	VND_IO_H
95	RX5n	54	VND_IO_J
94	RX5p	55	3.3V_GND
93	GND	56	3.3V_GND
92	RX4n	57	3.3V_GND
91	RX4p	58	3.3V_GND
90	GND	59	3.3V_GND
89	RX3n	60	3.3V
88	RX3p	61	3.3V
87	GND	62	3.3V
86	RX2n	63	3.3V
85	RX2p	64	3.3V
84	GND	65	3.3V
83	RX1n	66	3.3V
82	RX1p	67	3.3V
81	GND	68	3.3V
80	RX0n	69	3.3V
79	RX0p	70	3.3V_GND
78	GND	71	3.3V_GND
77	(RX_MCLKn)	72	3.3V_GND
76	(RX_MCLKp)	73	3.3V_GND
75	GND	74	3.3V_GND

11. Functional Block Diagram

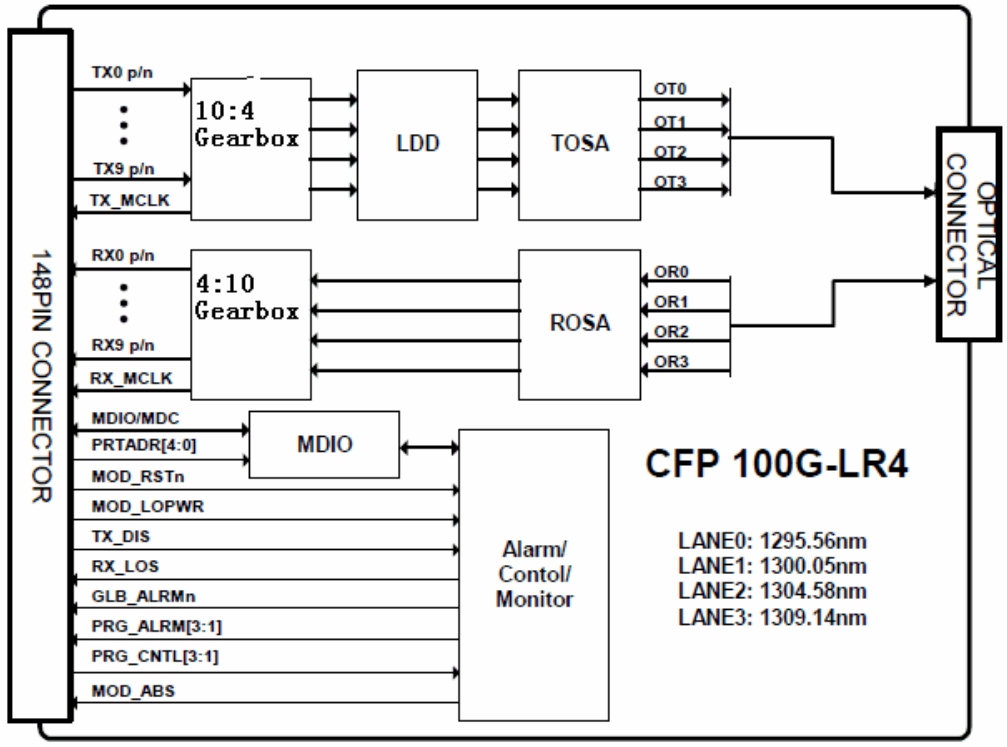

12. Revision History

Version	Date	Description	Prepared by
V6	2025	Unified WincoTek datasheet format	WincoTek
V6.1	2026-10-23	Engineering and format review	WincoTek