100G QSFP28 to 4x25G SFP28 Direct Attach Cable (DAC) 7m



Product Overview 3

Part Number WTDC100-4S25-7

1. Product Overview

QSFP28 passive copper cable assembly feature eight differential copper pairs, providing four data transmission channels at speeds up to 28Gbps per channel, and meets 100G Ethernet, 25G Ethernet and InfiniBand Enhanced Data Rate (EDR) requirements. Available in a broad range of wire gages-from 26AWG through 30AWG-this 100G copper cable assembly features low insertion loss and low cross talk.

Designed for applications in the data center, networking and telecommunications markets that require a high speed, reliable cable assembly, this next generation product shares the same mating interface with QSFP+ form factor, making it backward compatible with existing QSFP ports. QSFP28 can be used with current 10G and 14G applications with substantial signal integrity margin.

Features

- Compliant with SFF-8431, 8432 and 8472.
- Up to 25.78125 Gb/s per channel; 100G aggregate
- Up to 7m transmission
- Operating temperature: 0~70℃
- Single 3.3V power supply
- RoHS compliant
- Industry Standards
- 100G Ethernet (IEEE 802.3bj)
- 25G Ethernet (IEEE 802.3by)
- InfiniBand EDR
- SFF-8665 QSFP+ 28G 4X Pluggable Transceiver Solution (QSFP28)
- SFF-8402 SFP+ 1X 28Gb/s Pluggable Transceiver Solution (SFP28)

Applications

- Switches, servers and routers
- Data Center networks
- Storage area networks
- High performance computing
- Telecommunication and wireless infrastructure
- Medical diagnostics and networking
- Test and measurement equipment

The 7 m cable is an order-specific configuration. Wire gauge and electrical compliance at 7 m must be confirmed with the ordered assembly; the length/AWG table below covers the listed configurations only.

2. Pin Descriptions

Pin	Logic	Symbol	Description
1		GND	Ground
2	CML-I	Tx2n	Transmitter Inverted Data Input

Pin	Logic	Symbol	Description
3	CML-I	Tx2p	Transmitter Non-Inverted Data Input
4		GND	Ground
5	CML-I	Tx4n	Transmitter Inverted Data Input
6	CML-I	Tx4p	Transmitter Non-Inverted Data Input
7		GND	Ground
8	LVTTL-I	ModSelL	Module Select
9	LVTTL-I	ResetL	Module Reset
10		Vcc Rx	+3.3V Power Supply Receiver
11	LVCMOS-	SCL	2-wire serial interface clock
11	I/O	SCL	2-wire serial interface clock
	I/O		
12	LVCMOS-	SDA	2-wire serial interface data
12	I/O	SDA	2-wire serial interface data
	I/O		
13		GND	Ground
14	CML-O	Rx3p	Receiver Non-Inverted Data Output
15	CML-O	Rx3n	Receiver Inverted Data Output
16		GND	Ground
17	CML-O	Rx1p	Receiver Non-Inverted Data Output
18	CML-O	Rx1n	Receiver Inverted Data Output
19		GND	Ground
20		GND	Ground
21	CML-O	Rx2n	Receiver Inverted Data Output

Pin	Logic	Symbol	Description
22	CML-O	Rx2p	Receiver Non-Inverted Data Output
23		GND	Ground
24	CML-O	Rx4n	Receiver Inverted Data Output
25	CML-O	Rx4p	Receiver Non-Inverted Data Output
26		GND	Ground
27	LVTTL-O	ModPrsL	Module Present
28	LVTTL-O	IntL	Interrupt
29		Vcc Tx	+3.3V Power supply transmitter
30		Vcc1	+3.3V Power supply
31	LVTTL-I	LPMode	Low Power Mode
32		GND	Ground
33	CML-I	Tx3p	Transmitter Non-Inverted Data Input
34	CML-I	Tx3n	Transmitter Inverted Data Input
35		GND	Ground
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input
37	CML-I	Tx1n	Transmitter Inverted Data Input
38		GND	Ground

3. Additional Specifications

Notes: Reflection Coefficient given by equation SDD11(dB) < 16.5 - 2 × SQRT (f), with f in GHz Reflection Coefficient given by equation SDD11(dB) < 10.66 - 14 × log10(f/5.5), with f in GHz Reflection Coefficient given by equation SCD11(dB) < 22 - (20/25.78) *f, with f in GHz Reflection Coefficient given by equation SCD11(dB) < 15 - (6/25.78) *f, with f in GHz Reflection Coefficient given by equation SCD21(dB) < 27 - (29/22) *f, with f in GHz

4. Additional Specifications


Length (m)	Cable AWG
1	30
2	30
3	30/26
4	26
5	26

5. Regulatory Compliance

Feature	Test Method	Performance
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883C Method 3015.7	Class 1(>2000 Volts)
Electromagnetic Interference (EMI)	FCC Class B	Compliant with Standards

Feature	Test Method	Performance
Electromagnetic Interference (EMI)	CENELEC EN55022 Class B	Compliant with Standards
Electromagnetic Interference (EMI)	CISPR22 ITE Class B	Compliant with Standards
RF Immunity (RFI)	IEC61000-4-3	Typically Show no Measurable Effect from a 10V/m Field Swept from 80 to 1000MHz
RoHS Compliance	RoHS Directive 2011/6/5/EU and it's Amendment Directives 6/6	RoHS 6/6 compliant

6. Technical Figure 1

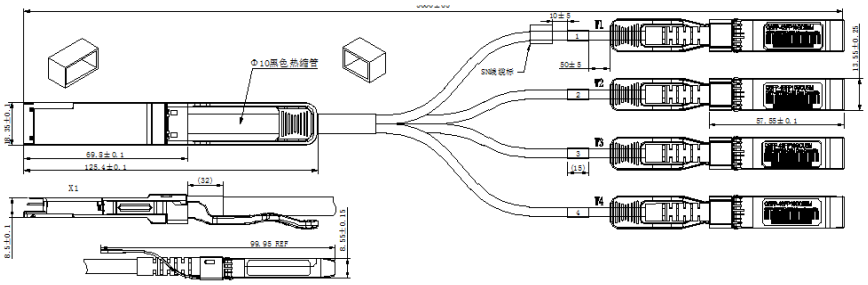

7. Revision History

Version	Date	Description	Prepared by
V6	2025	Unified WincoTek datasheet format	WincoTek
V6.1	2026-10-23	Engineering and format review	WincoTek