WTQ4HL1M

400G QSFP-DD Transceiver 1310nm SMF 10km

Part Number WTQ4HL1M	Reach 10km SMF	Temperature 0°C~+70°C



1. Product Overview

This product is a 400Gb/s Quad Small Form Factor Pluggable-double density (QSFP-DD) optical module designed for 10km optical communication applications. The module converts 8 channels of 50Gb/s (PAM4) electrical input data to 4 channels of parallel optical signals, each capable of 100Gb/s operation for an aggregate data rate of 400Gb/s. Reversely, on the receiver side, the module converts 4 channels of parallel optical signals of 100Gb/s each channel for an aggregate data rate of 400Gb/s into 8 channels of 50Gb/s (PAM4) electrical output data.

An optical fiber cable with an MTP/MPO-12 connector can be plugged into the module receptacle. Proper alignment is ensured by the guide pins inside the receptacle. The cable usually cannot be twisted for proper channel to channel alignment. Electrical connection is achieved through a QSFP-DD MSA-compliant edge type connector.

The product is designed with form factor, optical/electrical connection and digital diagnostic interface according to the QSFP-DD Multi-Source Agreement (MSA) Type 2. It has been designed to meet the harshest external operating conditions including temperature, humidity and EMI interference.

Functional Descriptions

The module incorporates 4 parallel channels on 1310nm center wavelength, operating at 100G per channel. The transmitter path incorporates a quad channel EML driver together with 4 parallel EMLs. On the receiver path, a PD array is connected with a quad channel TIA to convert the parallel 400Gb/s optical input into 4 channels of parallel 100Gb/s (PAM4) electrical signals. A DSP basis gearbox is used to convert 8 channels of 25GBaud PAM4 signals into 4 channels of 50GBaud PAM4 signals and also an 8-channel retimer and FEC block are integrated in this DSP. The electrical interface is compliant with IEEE 802.3bs and QSFP-DD MSA in the transmitting and receiving directions, and the optical interface is compliant to QSFP-DD MSA with MPO-12 connector.

Features

- QSFP-DD MSA compliant
- Parallel 4 Optical Lanes
- 100G Lambda MSA 100G-LR Specification compliant
- Up to 10km transmission on single mode fiber (SMF) with FEC
- Operating case temperature: 0 to 70℃
- 8x53.125Gb/s electrical interface (400GAUI-8)
- Data Rate 106.25Gbps (PAM4) per channel.
- Maximum power consumption 12W
- MPO-12 connector
- RoHS compliant

Applications

- 400G Ethernet
- InfiniBand interconnects
- Datacenter Enterprise networking

2. Ordering Information

Part Number	Data Rate (Gbps)	Wavelength (nm)	Transmission Distance(km)	Temperature (oC) (Operating Case)
WTQ4HL1M	400Gb/s	1310nm	10km SMF	0°C~+70°C

3. Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Units	Notes
Storage Temperature	TS	-40	85	degC	
Operating Case Temperature	TOP	0	70	degC	
Power Supply Voltage	VCC	-0.5	3.6	V	
Relative Humidity (non-condensation)	RH	0	85	%	
Damage Threshold, each Lane	THd	5.5		dBm	

4. Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Units	Notes
Operating Case Temperature	TOP	0		70	degC	
Power Supply Voltage	VCC	3.135	3.3	3.465	V	
Data Rate, each Lane			26.5625		GBd	PAM4
Data Rate Accuracy		-100		100	ppm	
Pre-FEC Bit Error Ratio				2.4x10-4		
Post-FEC Bit Error Ratio				1x10-12		1
Link Distance	D	0.002		10	km	2

5. Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Typical	Max	Units	Notes
Power Consumption					12	W	
Supply Current	Icc				3.64	A	
Transmitter (each Lane)	Transmitter (each Lane)	Transmitter (each Lane)	Transmitter (each Lane)	Transmitter (each Lane)	Transmitter (each Lane)	Transmitter (each Lane)	Transmitter (each Lane)
Signaling Rate, each Lane	TP1	26.5625 ± 100 ppm	26.5625 ± 100 ppm	26.5625 ± 100 ppm	26.5625 ± 100 ppm	GBd	
Differential pk-pk Input Voltage Tolerance	TP1a	900				mVpp	1
Differential Termination Mismatch	TP1			10	10	%	
Differential Input Return Loss	TP1	IEEE 802.3-2015 Equation(83E-5)				dB	
Differential to Common Mode Input Return Loss	TP1	IEEE 802.3-2015 Equation(83E-6)				dB	
Module Stressed Input Test	TP1a	See IEEE 802.3bs 120E.3.4.1	See IEEE 802.3bs 120E.3.4.1	See IEEE 802.3bs 120E.3.4.1	See IEEE 802.3bs 120E.3.4.1		2

Parameter	Symbol	Min	Typical	Typical	Max	Units	Notes
Single-ended Voltage Tolerance Range (Min)	TP1a	-0.4 to 3.3	-0.4 to 3.3	-0.4 to 3.3	-0.4 to 3.3	V	
DC Common Mode Input Voltage	TP1	-350		2850	2850	mV	3
Receiver (each Lane)	Receiver (each Lane)	Receiver (each Lane)	Receiver (each Lane)	Receiver (each Lane)	Receiver (each Lane)	Receiver (each Lane)	Receiver (each Lane)
Signaling Rate, each lane	TP4	26.5625 ± 100 ppm	26.5625 ± 100 ppm	26.5625 ± 100 ppm	26.5625 ± 100 ppm	GBd	
Differential Peak-to-Peak Output Voltage	TP4			900	900	mVpp	
AC Common Mode Output Voltage, RMS	TP4			17.5	17.5	mV	
Differential Termination Mismatch	TP4			10	10	%	
Differential Output Return Loss	TP4	IEEE 802.3-2015 Equation(83E-2)					
Common to Differential Mode Conversion Return Loss	TP4	IEEE 802.3-2015 Equation(83E-3)					
Transition Time, 20% to 80%	TP4	9.5				ps	
Near-end Eye Symmetry Mask Width (ESMW)	TP4		0.265			UI	
Near-end Eye Height,Differential	TP4	70				mV	
Far-end Eye Symmetry Mask Width (ESMW)	TP4		0.2			UI	
Far-end Eye Height,Differential	TP4	30				mV	
Far-end Pre-cursor ISI Ratio	TP4	-4.5		2.5	2.5	%	
Common Mode Output Voltage (Vcm)	TP4	-350		2850	2850	mV	3

6. Recommended Operating Conditions

Parameter	Symbol	Min	Max	Units	Notes
Temperature Monitor Absolute Error	DMI_Temp	-3	3	degC	Over operating temperature range
Supply Voltage Monitor Absolute Error	DMI _VCC	-0.1	0.1	V	Over full operating range
Channel RX Power Monitor Absolute Error	DMI_RX_Ch	-2	2	dB	1
Channel Bias Current Monitor	DMI_Ibias_Ch	-10%	10%	mA	
Channel TX Power Monitor Absolute Error	DMI_TX_Ch	-2	2	dB	1

7. Optical Parameters

Parameter	Symbol	Min	Typical	Max	Units	Notes
Center Wavelength	λc	1304.5	1310	1317.5	nm	
Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter	Transmitter
Data Rate, each Lane		53.125 ± 100 ppm	53.125 ± 100 ppm	53.125 ± 100 ppm	GBd	
Modulation Format		PAM4	PAM4	PAM4		
Side-mode Suppression Ratio	SMSR	30			dB	
Average Launch Power, each Lane	PAVG	-1.4		4.5	dBm	1
Outer Optical Modulation Amplitude (OMAouter), each Lane	POMA	0.7		4.7	dBm	2
Launch Power in OMAouter minus TDECQ, each Lane for ER ≥ 4.5dB for ER < 4.5dB		-0.7 -0.6			dBm	
Transmitter and Dispersion Eye Closure for PAM4 (TDECQ), each Lane	TDECQ			3.4	dB	
TDECQ – 10*log10(Ceq), each Lane				3.4	dB	3
Extinction Ratio	ER	3.5			dB	
RIN17.1OMA	RIN			-136	dB/Hz	
Optical Return Loss Tolerance	TOL			15.6	dB	
Transmitter Reflectance	RT			-26	dB	
Transmitter Transition Time				17	ps	
Average Launch Power of OFF Transmitter, each Lane	Poff			-15	dBm	
Receiver	Receiver	Receiver	Receiver	Receiver	Receiver	Receiver
Data Rate, each Lane		53.125 ± 100 ppm	53.125 ± 100 ppm	53.125 ± 100 ppm	GBd	
Modulation Format		PAM4	PAM4	PAM4		
Damage Threshold, each Lane	THd	5.5			dBm	4
Average Receive Power, each Lane		-7.7		4.5	dBm	5
Receive Power (OMAouter), each Lane				4.7	dBm	
Receiver Sensitivity (OMAouter), each Lane	SEN			Equation (1)	dBm	6

Parameter	Symbol	Min	Typical	Max	Units	Notes
Stressed Receiver Sensitivity (OMAouter), each Lane	SRS			-4.1	dBm	7
Receiver Reflectance	RR			-26	dB	
LOS Assert	LOSA	-15			dBm	
LOS De-assert	LOSD			-10.7	dBm	
LOS Hysteresis	LOSH	0.5			dB	
Stressed Conditions for Stress Receiver Sensitivity (Note 8)	Stressed Conditions for Stress Receiver Sensitivity (Note 8)	Stressed Conditions for Stress Receiver Sensitivity (Note 8)	Stressed Conditions for Stress Receiver Sensitivity (Note 8)	Stressed Conditions for Stress Receiver Sensitivity (Note 8)	Stressed Conditions for Stress Receiver Sensitivity (Note 8)	Stressed Conditions for Stress Receiver Sensitivity (Note 8)
Stressed Eye Closure for PAM4 (SECQ), Lane under Test			3.4		dB	
SECQ – 10*log10(Ceq), Lane under Test				3.4	dB	


8. Pin Descriptions

PIN	Logic	Symbol	Name/Description	Plug Sequence
1		GND	Ground	1B
2	CML-I	Tx2n	Transmitter Inverted Data Input	3B
3	CML-I	Tx2p	Transmitter Non-Inverted Data Input	3B
4		GND	Ground	1B
5	CML-I	Tx4n	Transmitter Inverted Data Input	3B
6	CML-I	Tx4p	Transmitter Non-Inverted Data Input	3B
7		GND	Ground	1B
8	LVTTL-I	ModSelL	Module Select	3B
9	LVTTL-I	ResetL	Module Reset	3B
10		VccRx	+3.3V Power Supply Receiver	2B
11	LVCMOS-I/O	SCL	2-wire serial interface clock	3B
12	LVCMOS-I/O	SDA	2-wire serial interface data	3B
13		GND	Ground	1B
14	CML-O	Rx3p	Receiver Non-Inverted Data Output	3B
15	CML-O	Rx3n	Receiver Inverted Data Output	3B
16	GND	Ground	1B	
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	3B


PIN	Logic	Symbol	Name/Description	Plug Sequence
18	CML-O	Rx1n	Receiver Inverted Data Output	3B
19		GND	Ground	1B
20		GND	Ground	1B
21	CML-O	Rx2n	Receiver Inverted Data Output	3B
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	3B
23		GND	Ground	1B
24	CML-O	Rx4n	Receiver Inverted Data Output	3B
25	CML-O	Rx4p	Receiver Non-Inverted Data Output	3B
26		GND	Ground	1B
27	LVTTL-O	ModPrsL	Module Present	3B
28	LVTTL-O	IntL	Interrupt	3B
29		VccTx	+3.3V Power supply transmitter	2B
30		Vcc1	+3.3V Power supply	2B
31	LVTTL-I	InitMode	Initialization mode; In legacy QSFP applications, the InitMode pad is called LPMODE	3B
32		GND	Ground	1B
33	CML-I	Tx3p	Transmitter Non-Inverted Data Input	3B
34	CML-I	Tx3n	Transmitter Inverted Data Input	3B
35		GND	Ground	1B
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	3B
37	CML-I	Tx1n	Transmitter Inverted Data Input	3B
38		GND	Ground	1B
39		GND	Ground	1A
40	CML-I	Tx6n	Transmitter Inverted Data Input	3A
41	CML-I	Tx6p	Transmitter Non-Inverted Data Input	3A
42		GND	Ground	1A
43	CML-I	Tx8n	Transmitter Inverted Data Input	3A
44	CML-I	Tx8p	Transmitter Non-Inverted Data Input	3A
45		GND	Ground	1A
46		Reserved	For future use	3A

PIN	Logic	Symbol	Name/Description	Plug Sequence
47		VS1	Module Vendor Specific 1	3A
48		VccRx1	3.3V Power Supply	2A
49		VS2	Module Vendor Specific 2	3A
50		VS3	Module Vendor Specific 3	3A
51		GND	Ground	1A
52	CML-O	Rx7p	Receiver Non-Inverted Data Output	3A
53	CML-O	Rx7n	Receiver Inverted Data Output	3A
54		GND	Ground	1A
55	CML-O	Rx5p	Receiver Non-Inverted Data Output	3A
56	CML-O	Rx5n	Receiver Inverted Data Output	3A
57		GND	Ground	1A
58		GND	Ground	1A
59	CML-O	Rx6n	Receiver Inverted Data Output	3A
60	CML-O	Rx6p	Receiver Non-Inverted Data Output	3A
61		GND	Ground	1A
62	CML-O	Rx8n	Receiver Inverted Data Output	3A
63	CML-O	Rx8p	Receiver Non-Inverted Data Output	3A
64		GND	Ground	1A
65		NC	No Connect	3A
66		Reserved	For future use	3A
67		VccTx1	3.3V Power Supply	2A
68		Vcc2	3.3V Power Supply	2A
69		Reserved	For Future Use	3A
70		GND	Ground	1A
71	CML-I	Tx7p	Transmitter Non-Inverted Data Input	3A
72	CML-I	Tx7n	Transmitter Inverted Data Input	3A
73		GND	Ground	1A
74	CML-I	Tx5p	Transmitter Non-Inverted Data Input	3A
75	CML-I	Tx5n	Transmitter Inverted Data Input	3A
76		GND	Ground	1A


9. Transmitter OMA and Receiver Sensitivity versus TDECQ and SECQ

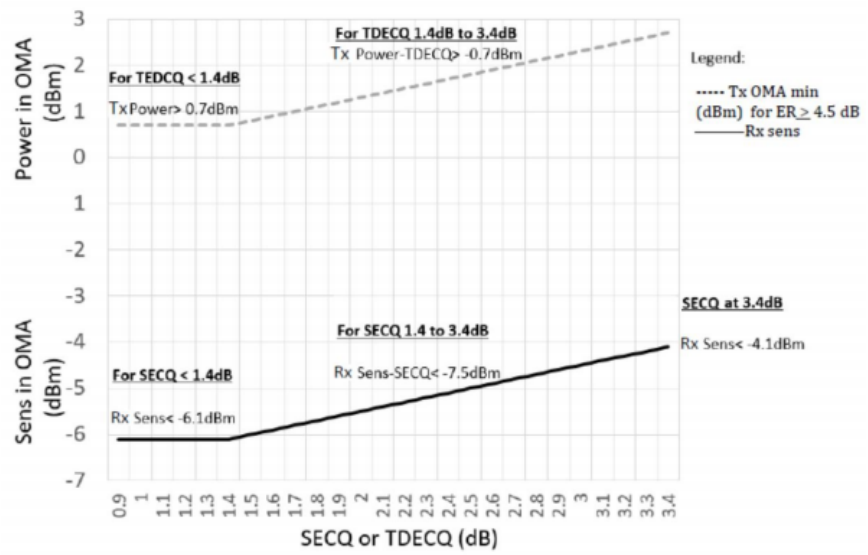


10. Pin Assignment

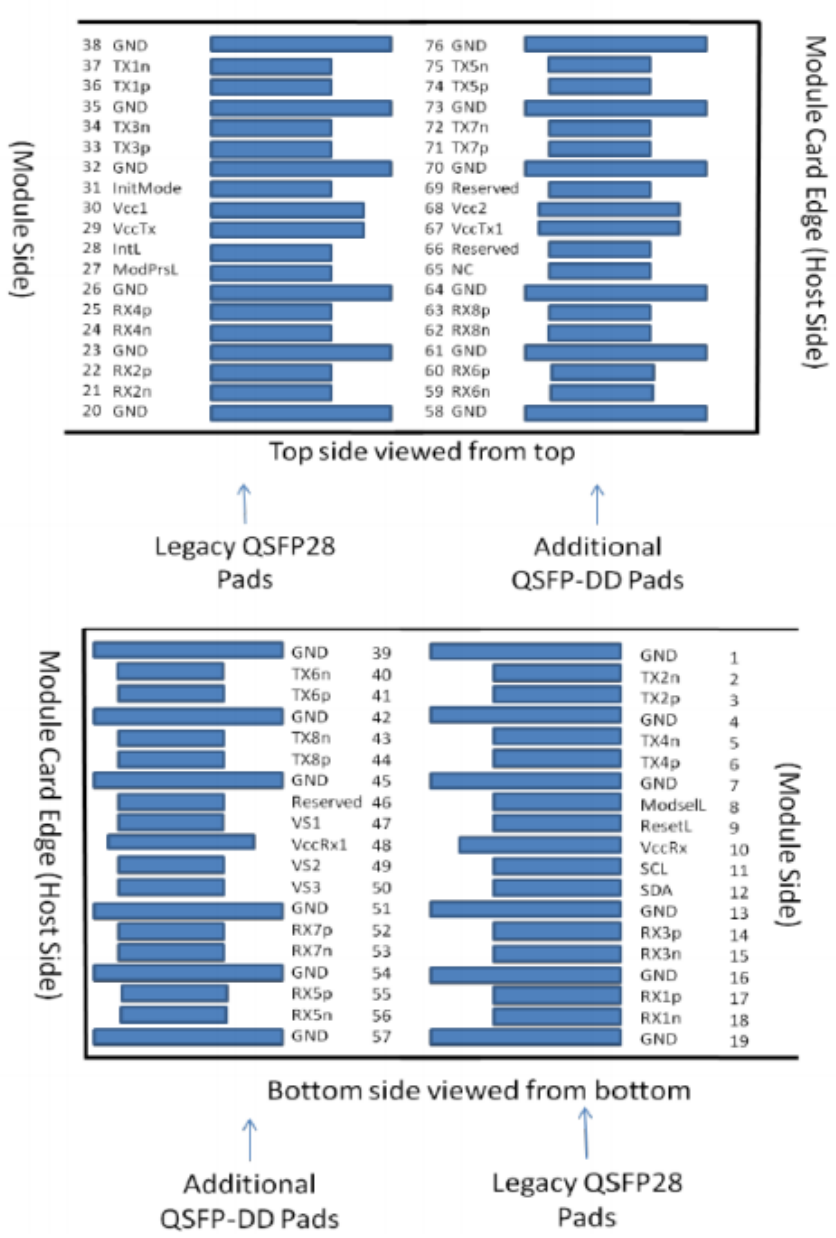


11. Power Supply Filtering Circuit

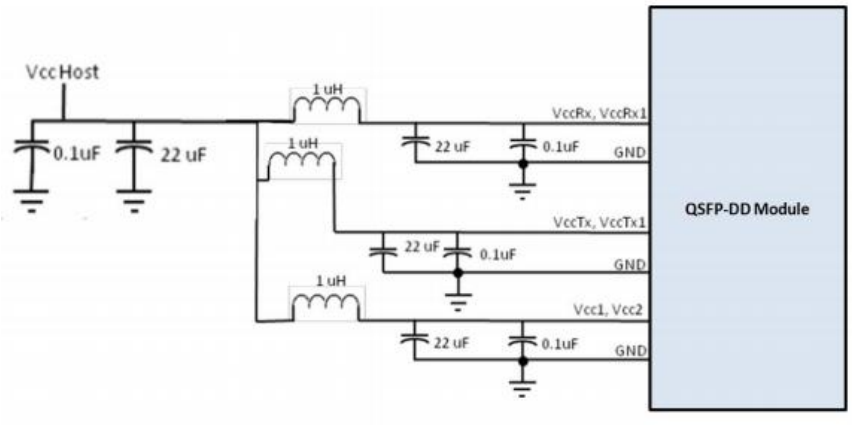

12. Functional Block Diagram

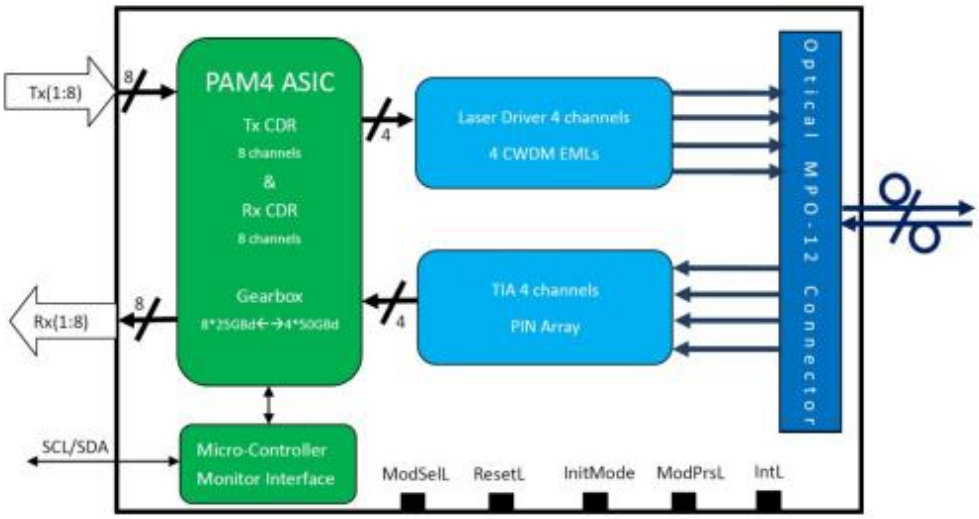

13. Mechanical Specifications

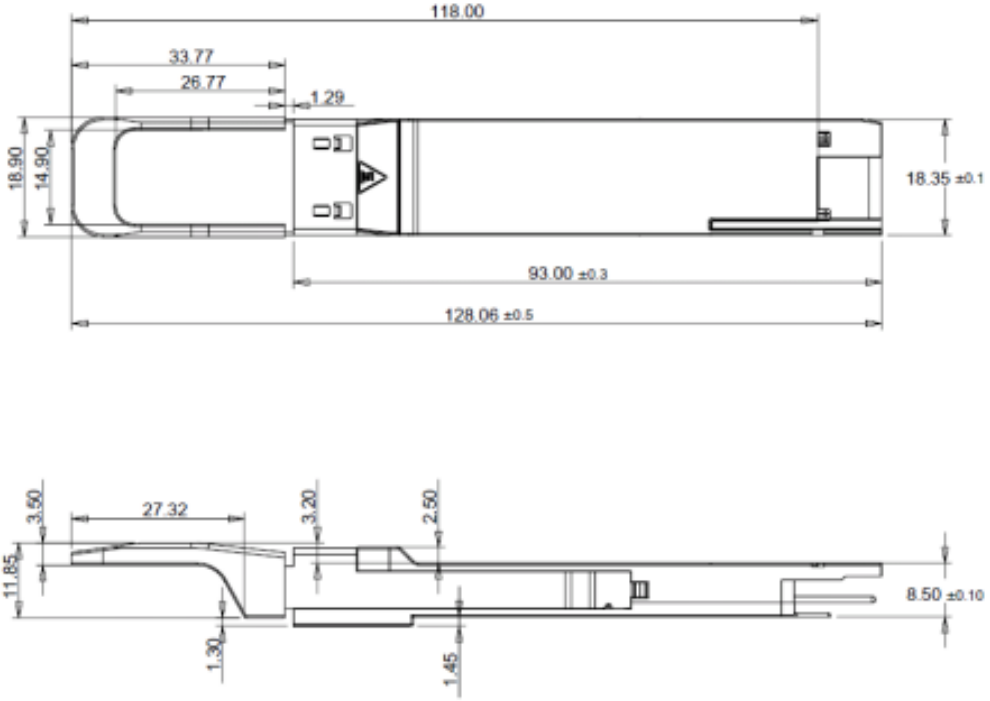

14. Revision History

Version	Date	Description	Prepared by
V6	2025	Unified WincoTek datasheet format	WincoTek
V6.1	2026-10-23	Engineering and format review	WincoTek